


Airline Installation Instructions


AdvantageAir
Energy efficient air-conditioning

1. Check the proposed location of the AirLine grille in the ceiling void. It should be ensured that the installation of the AirLine grille does not require any ceiling joists to be removed. If any joists are to be removed, they should be braced accordingly before any joists are cut.
2. Mark the cut-out on the ceiling **540 long x 200 wide**. Cut the whole carefully, ensuring that each side is cut straight.
3. Remove the white AirLine grille from the black AirLine boot, by inserting a flat blade screwdriver in the clip release, located at the mid-point of the short side of the white grille, and gently pull up on the white grille facing. Be careful not to damage the grille.

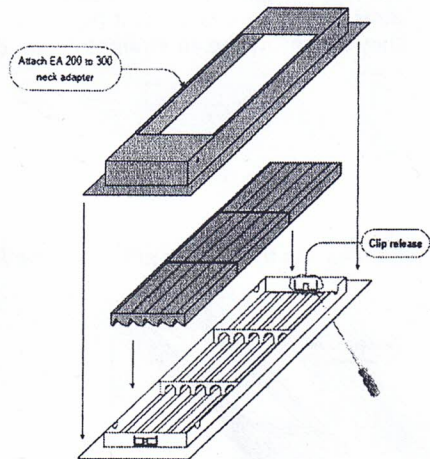


4. Connect the spigot adaptor to the AirLine boot, which is easier to do before the duct is taped on to the spigot. One way to do this is as shown below:

- I. Clip both corners of one of the long sides of the spigot into the AirLine boot:



- II. Knock each of the remaining corners in one at a time, ensuring to push against the diagonally opposite corner as you knock each remaining corner into place. Use a rubber mallet to knock the corners in, or alternatively the back of your hand:

Knock this corner




Hold this corner (push gently but firmly in the direction of the arrow)


Airline Installation Instructions

AdvantageAir
Energy efficient air-conditioning

5. Pull the duct through the cut out hole in the ceiling, and tape securely to the spigot.
6. Push the AirLine boot, spigot and duct back through the hole and secure in place using the plastic clips provided.
7. Insert the air-direction biscuits into the 3 cavities of the white grille face. The biscuits can be rotated 360 degrees to achieve the required air throw direction, or alternatively, if the biscuits are inserted upside down, they will throw the air straight down. Ensure the biscuits lock into place

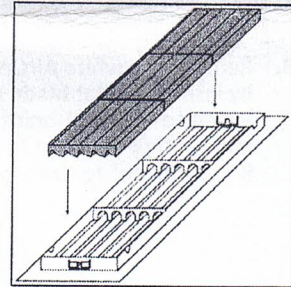

8. Gently push the AirLine grille into the AirLine boot, ensuring it locks into place

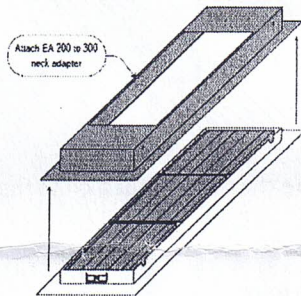

9. To remove the AirLine grille, push the black biscuits up to expose the clip release, located at the midpoint of the short side. Insert a flatblade screwdriver and gently pull down on the AirLine grille. Note – the black biscuits are loose and can fall out if the AirLine grille is not removed carefully.